


Digital Reference Unit

with high, low & intermediate set points

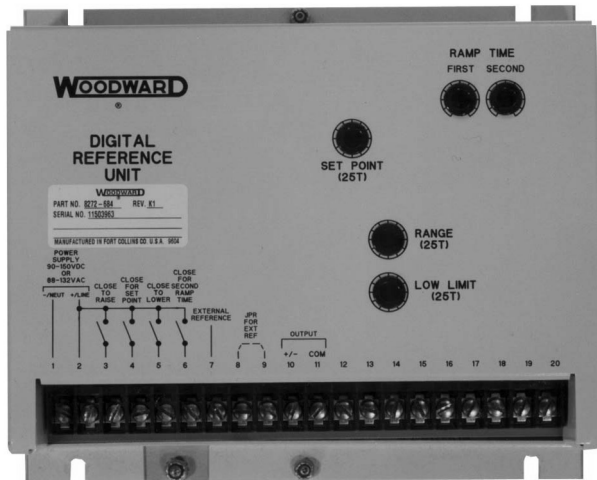

- Precise reference signal
- 3 adjustable set points
- 2 separate, fully-adjustable ramp rates
- Digital circuitry
- Precise remote operation

APPLICATIONS

The Digital Reference Unit generates a precise voltage that may be used wherever a very accurate reference signal is required. Typical use combines the Digital Reference Unit with other Woodward controls for regulation of speed, load, pressure, or voltage.

DESCRIPTION

Reference Set Points—The Digital Reference Unit provides electronic control of the reference-signal voltage. Lower limit, upper limit, and an intermediate set point can be selected.

Ramp Rates—The Digital Reference Unit has two separate and independent ramp rates (which determine the time required to change from the low limit to the high limit). Each ramp rate can be set for a ramp rate from a minimum of 5 seconds to a maximum of 10 minutes.

Location of Adjustments—Rocker switches under the cover allow selection of ramp rate ranges. All other adjustments are made from potentiometers accessible on the front of the cover.

SPECIFICATIONS

Construction The Digital Reference Unit consists of a printed circuit board housed in a steel chassis and cover.

Power Supply 10–45 Vdc
90–150Vdc
88–132 Vac, 45–440 Hz

Signal Output 0–8 Vdc

Ramp Rates:

Ramp 1 5 seconds to 10 minutes
Ramp 2 (switch selectable)
5 seconds to 10 minutes

Relay Indications (optional):

Low Limit
High Limit
Set Point

External Reference provided for ramp speed setting on Woodward EPG and 2500 controls.

Temperature –40 to +85 °C
–40 to +185 °F

Location Can be mounted in any position that provides adequate ventilation and room for servicing. May not be mounted on the engine. Protect from exposure to rain or pressure wash.

PO Box 1519
 Fort Collins CO, USA
 80522-1519
 1000 East Drake Road
 Fort Collins CO 80525
 Ph: (1)(970) 482-5811
 Fax: (1)(970) 498-3058

**Plants, Subsidiaries,
 Branch/Regional Offices**
 Australia
 Brazil
 China
 Czech Republic
 England
 Germany
 India
 Japan
 Korea
 Mexico
 Netherlands
 New Zealand
 Poland
 Scotland
 Singapore
 United Arab Emirates
 United States


Distributors & Service
 Woodward has an international network of distributors and service facilities. For your nearest representative call (1)(800) 835-5182 or see the Worldwide Directory on our web site (<http://www.woodward.com/industrial/address.htm>).

Corporate Headquarters
 Rockford IL, USA
 Ph: (1)(815) 877-7441

www.woodward.com

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.


© Woodward Governor Company, 2000
 All Rights Reserved

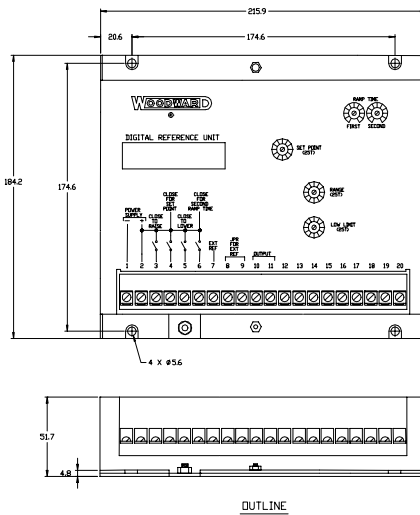

CONVERSION CHART

MM	INCH
215.9	8.500
184.2	7.250
174.6	6.875
51.7	2.032
20.6	.812
5.6	.219
4.8	.188


METRIC

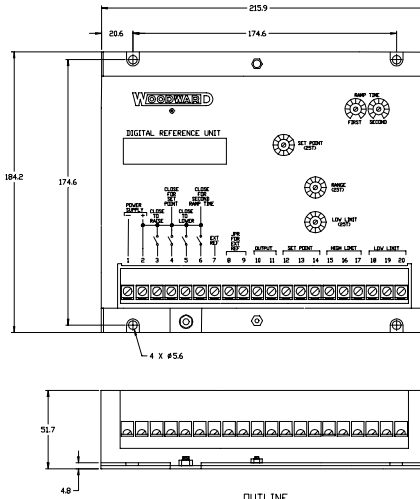

CONVERSION CHART

MM	INCH
215.9	8.500
184.2	7.250
174.6	6.875
51.7	2.032
20.6	.812
5.6	.219
4.8	.188


METRIC

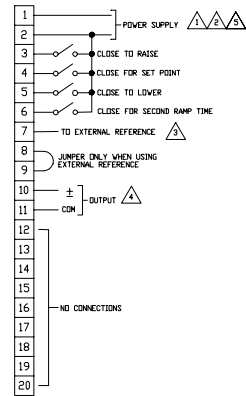

PLANT WIRING

- NOTES:
- 1 POWER REQUIREMENT LESS THAN 3 WATTS.
 - 2 TERMINAL 1 TO BE NEGATIVE POLARITY FOR DC POWER SUPPLY. NEUTRAL FOR AC POWER SUPPLY. TERMINAL 2 TO BE POSITIVE POLARITY FOR DC POWER SOURCE. LINE FOR AC POWER SUPPLY.
 - 3 EXTERNAL REFERENCE USED ONLY ON SPEED REFERENCE APPLICATIONS (SEE SHEET 7).
 - 4 REFER TO SHEETS 7 AND 8 FOR SPECIFIC OUTPUT CONNECTIONS.
 - 5 SEE OPTION CHART.

032-001
 00-04-14

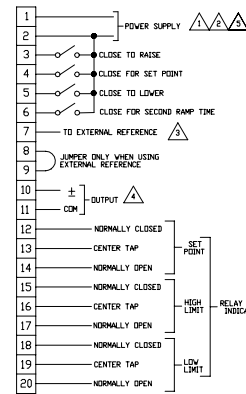

PLANT WIRING

- NOTES:
- 1 POWER REQUIREMENT LESS THAN 3 WATTS.
 - 2 TERMINAL 1 TO BE NEGATIVE POLARITY FOR DC POWER SUPPLY. NEUTRAL FOR AC POWER SUPPLY. TERMINAL 2 TO BE POSITIVE POLARITY FOR DC POWER SOURCE. LINE FOR AC POWER SUPPLY.
 - 3 EXTERNAL REFERENCE USED ONLY ON SPEED REFERENCE APPLICATIONS (SEE SHEET 7).
 - 4 REFER TO SHEETS 7 AND 8 FOR SPECIFIC OUTPUT CONNECTIONS.
 - 5 SEE OPTION CHART.

032-002
 00-04-14

Digital Reference Unit
 (8272-682/-684 above; 8272-683/-685 below)

Part Number	Power Source	Relay Indications?
8272-682	10-45 Vdc	No
8272-683	10-45 Vdc	Yes
8272-684	90-150 Vdc OR 88-132 Vac 45-440 Hz	No
8272-685	90-150 Vdc OR 88-132 Vac 45-440 Hz	Yes

For more information contact: